



(13.25)

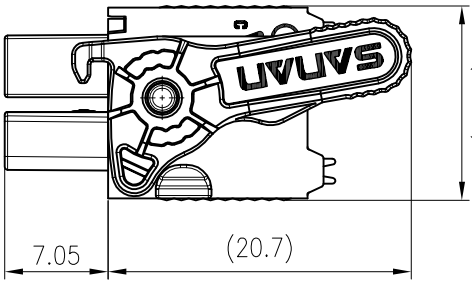

7.05

(20.7)


(3.1)

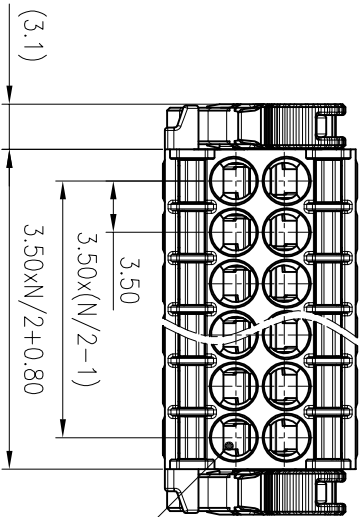

3.50

3.50x(N/2-1)

3.50xN/2+0.80

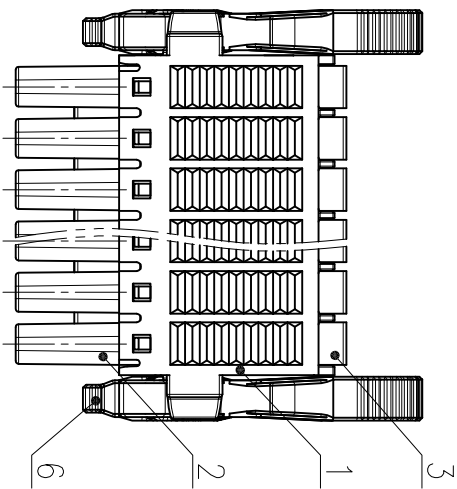



3

2

1

6

\*13.00

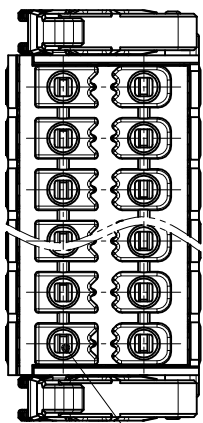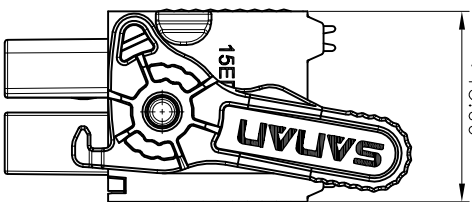

4

公差/General tolerances(mm)	
0	>3
~	>6
~	>10
~	>18
~	>30
~	>50
~	>80
~	>120
~	>180
~	>250
~	>315
~	>400
~	>500
±0.12	±0.18
±0.22	±0.26
±0.31	±0.37
±0.57	±0.57
±0.80	±0.80
±0.93	±1.05
±1.05	±1.15
±1.60	±2.20
±2.50	±2.50

0.1/10

±2

1 2 3 4 5 6

MATERIAL:	SURFACE:	
MAT NO.:		
STATUS:		
APPD:		
CHKD:	NAME: 宁波三安电子科技有限公司 Sanan Electrical Technology Co. Ltd	
DRFT:	DRAWING NO.: 15ESAKNHG-3.5-XXP-1Y-00A(H)	
SIZE: A4	SCALE:	SHEET
mm inch	1/1	1/1

ITEM	NAME OF PART	MATERIAL	NOTES
6	Card hook	PA66-GF	UL94V-0
5	Spring	Stainless steel	
4	Clamp	Copper alloy	Sn Plated
3	Button	POM	UL94HB
2	Cover	PA66	UL94V-0
1	Housing	PA66	UL94V-0

UL 标准/UL Standard:	B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)	300/8	50/8	/
EC 标准/EC Standard:			
过压类别/Overvoltage Category/污染等级/ Pollution Degree	III/3	III/2	II/2
额定电压/电流/Rated Voltage(V)/Current(A)	200/9.5	250/9.5	320/9.5
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	2.5	2.5	2.5
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG/mm <sup>2</sup> )	26~16/0.2~1.5		
间距/Pitch(mm)/线数范围/Poles	3.50/N=04~48P		
剥线长度/Stripping length(mm)	10		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		

1 2 3 4 5 6